


- A 3 HP POWER PACK, HOOTER
- B 2 L SIDE BOLTED TYPE RAILING-900HT WITH 1L SIDE HINGED DOOR AT CENTER 700MM CLEAR ENTRY
- C 2 W SIDE BOLTED TYPE RAILING-900HT
- D HYDRAULIC CYLINDER
- E MAINTENANCE STOPPER
- F PENDANT
- G LIFTING HOOKS
- H TOE GAIRD - 100MM HT ( ALL 4 SIDES )

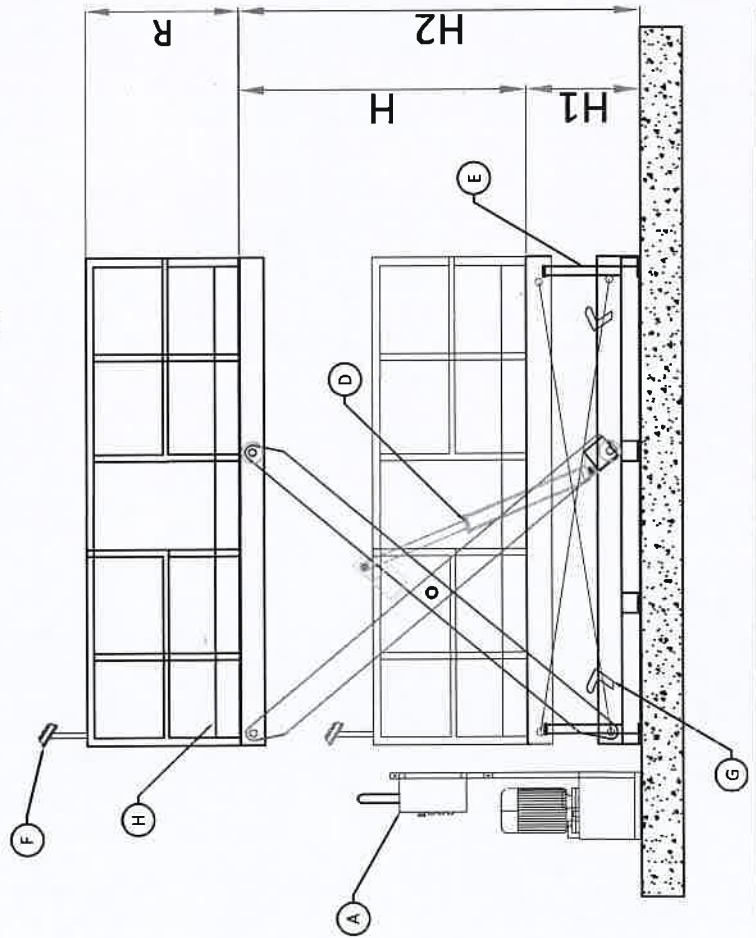

PAGE 2 OF 2

#APPROX 10MM COMPRESSION UNDER LOAD PER MTR TO BE ADJUSTED WITH INCHING MODE OPERATION  
 #THIS IS SCHEMATIC REPRESENTATION ONLY, ACTUAL MACHINE MAY VARY SLIGHTLY.

SR	PARAMETERS	SYMBOL	SPECIFICATION
1	CAPACITY	C	1000 KG
2	PLATFORM LENGTH	L	4000
3	PLATFORM WIDTH	W	3000
4	MOTOR	M	3 HP
5	MIN HEIGHT	H1	800
6	MAX. HEIGHT	H2	3000
7	LIFTING HEIGHT	H	2200
8	RAILING	R	900
9	NO OF STOPS		INFINITE
10	MOC		M.S.,RAL1004 GOLDEN YELLOW QD PAINT
11	LIFT OPERATION MOC		INCHING MODE
12	LOAD CONSIDERED		UNIFORMLY DISTRIBUTED
13	USABLE AREA (APPROX)		3900L X 2900W
14	OVERALL M/C DIMN (APPROX)		4000L X 3150W X 2000HT
15	LIFTING SPEED (APPROX)		1.5-2 m/min
16	HYDRAULIC CYLINDER		ASMITA MAKE
17	MOTOR		IMPORTED
18	HYDRAULIC PUMP		IMPORTED
19	HYDRAULIC HOSES		PARKER / MARKWELL
20	JOINTS (EXCEPT ROLLER/DRY RUNNING BUSH JOINTS ROLLER JOINT-DOUBLE BALL BEARING TYPE		
21	SAFETY FEATURE		1-HOSE BUST VALVE
			1-HOOTER
			2-LIMIT SWITCH

NOTE :

- 5METER HOSE PIPE

- ISMC BEAM FOR SUPORT TO BOTTOM FRAME IN CUSTOMER SCOPE

CUSTOMER - APCCO - INFRA

ALL DIMENSIONS ARE IN mm.

CD. NO	PRODUCT NO.
DRAWN	V. P
CHECKED	T. W
APPROVED	N. H

# JOIST-O-MECH (SINCE 1987)

FLOOR MOUNTED SCISSOR LIFT ( FMSL )

DRAWING NO.	MAY26-120-02 A	SHEET NO.	10FZ	REV.	RO
				NTS	