
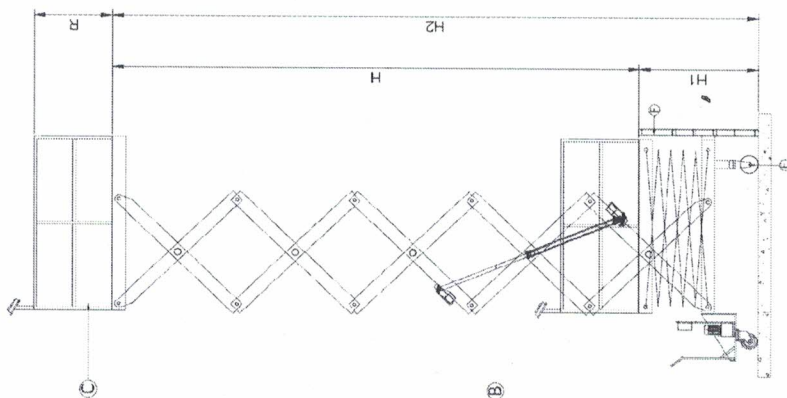


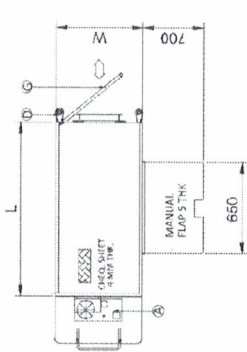

#THIS IS SCHEMATIC REPRESENTATION ONLY, APPROX 10MM COMPRESSION UNDER LOAD PER MTR. ACTUAL MACHINE MAY VARY SLIGHTLY.

- A 1 HP AC POWER PACK, CONTROL PANEL/HOOPER
 - B LIFTING CYLINDER
 - C 3 SIDE REMOVABLE RAILING WITH PENDANT
 - D 2Nos. FLOOR LOCK
 - E FRONT FIXED (NYLON) WHEEL (SUITABLE)
 - F LADDER
 - G SINGLE OPENING HINGED DOOR
 - H REAR SWIVEL WITH BREAK (NYLON) WHEEL
- PUSH PULL WILL BE MANUAL (1-2 PERSONS REQ. WITH NO LOAD CONDITION)

MOC-SS-304

SR	PARAMETERS	SYMBOL	SPECIFICATION
1	CAPACITY	C	100 Kgs
2	PLATFORM LENGTH	L	1050
3	PLATFORM WIDTH	W	700
4	POWER PACK	P	1-HP (FLP)
5	MIN HEIGHT	H1	800
6	MAX. HEIGHT	H2	4000
7	LIFTING HEIGHT	H	3200
8	RAILING	R	900
9	MOC		SS304 (MATTE FINISH)
10	LIFT OPERATION MOC		INCHING MODE
11	LOAD CONSIDERED		UNIFORMLY DISTRIBUTED
12	USABLE AREA (APPROX)		1000L x 600W
13	OVERALL M/C DIMN (APPROX)		1500L x 1000W x 2000
14	LIFTING SPEED (APPROX)		1.5-2 m/min
15	HYDRAULIC CYLINDER		IN HOUSE
16	MOTOR		CG MAKE
17	HYDRAULIC PUMP		REXROTH / YUKEN
18	HYDRAULIC VALVE		V TEK
19	HYDRAULIC HOSES		PARKER / MARKWELL
20	JOINTS (EXCEPT ROLLER DRY RUNNING BUSH JOINTS ROLLER JOINT-DOUBLE BALL BEARING TYPE)		
21	SAFETY FEATURE	HYDRAULIC ELECTRIC	1-HOSE BUST VALVE 1-LIMIT SWITCH
22	BELOW ITEMS TO BE FLAMEPROOF:-		
	1)1 NO. FLAMEPROOF MOTOR CG MAKE		
	2)1 NO. FLAMEPROOF ENCLOSURE FOR CONTROL PANNEL		
	3)1 NO. FLAMEPROOF ENCLOSURE FOR HYDRAULIC BLOCK		
	4)FLAMEPROOF LIMIT SWITCH FOR EACH FLOOR		
	5) FLAMEPROOF PUSH BUTTON PENDANT		



CUSTOMER-SYNDIC		ALL DIMENSIONS ARE IN MTR.	
JOIST-O-MECH (SINCE-1987)		CC.NO	PRODUCT NO.
		DRAWN	SP
		CHECKED	LP
		APPROVED	NH
E.L.E. HYDRAULIC SCISSOR LIFT.		SCALE:	N/T
DRAWING NO.	JUN26-J1147	SHEET NO.	1 OF 1
		REV.	R0