

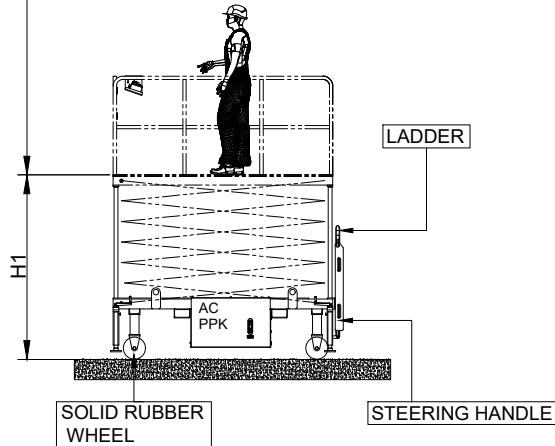
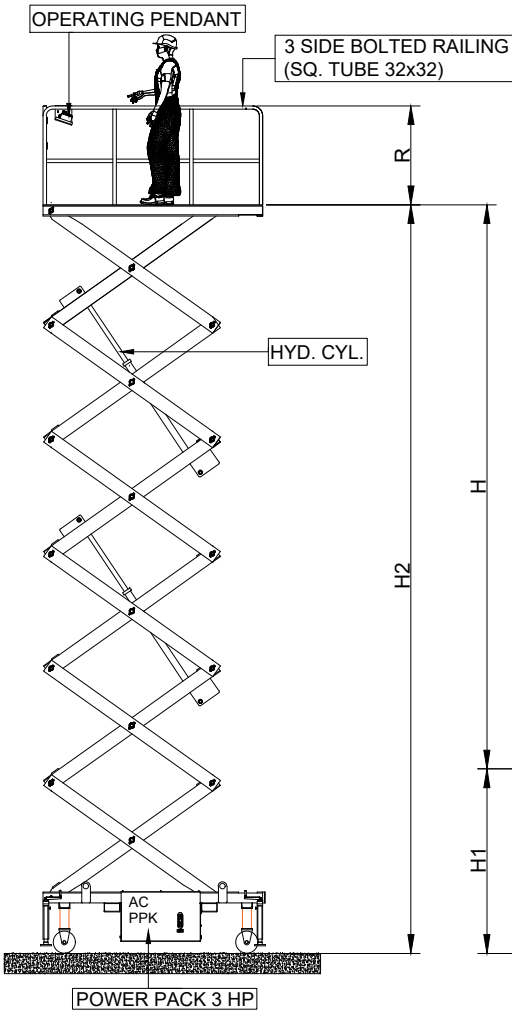


IF IN DOUBT PL ASK!

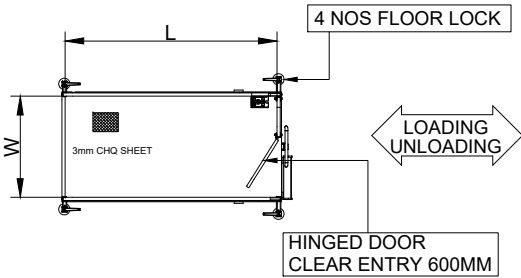

SR	MATERIAL DESCRIPTION	MAKE
1	CONTACTOR	SCHNEIDER
2	SMPS	NHP
3	LIMIT SWITCH	JAY BALAJI
4	PUSH BUTTON	TEKNIK
5	MPCB	SCHNEIDER
6	MOTOR	IMPORTED (TARGET / EQUIVALENT)
7	CABLE	POLYCAB
8	TERMINALS	CONNECTWELL
9	PUSH BUTTON BOX AND PANEL	INHOUSE

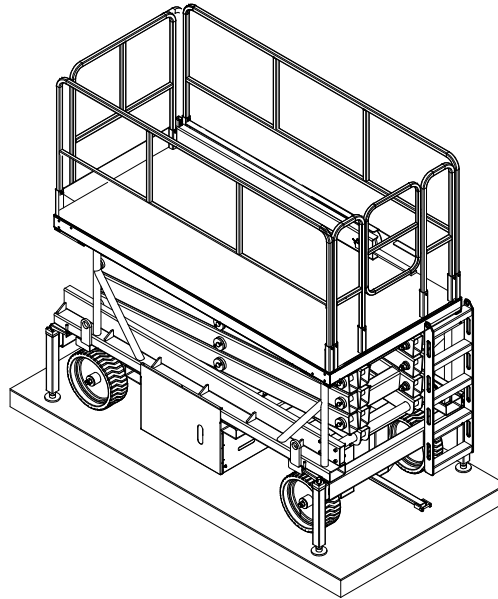

3D VIEW ONLY FOR REF.

SR	PARAMETERS	SYMBOL	SPECIFICATION
1	CAPACITY	C	350 KGS
2	PLATFORM LENGTH	L	2700
3	PLATFORM WIDTH	W	1200
4	POWERPACK	HP	3 HP
5	MIN HEIGHT	H1	2000
6	MAXIMUM HEIGHT	H2	14000
7	LIFT HEIGHT	H	12000
8	RAILING	R	900

1	MOC		M.S	
	FINISH	FRAME	GOLDEN YELLOW ENAMEL PAINT	
		SCISSOR	GRAY ENAMEL PAINT	
2	LIFT OPERATION		INCHING MODE	
3	LOAD CONSIDERED		UNIFORMLY DISTRIBUTED	
4	USABLE AREA		2600 L x 1100 W (APPROX)	
5	OVERALL M/C DIMN		3000 L X 1500 W X 3200H (APPROX)	
6	LIFTING SPEED		2-2.5 M/MIN (APPROX.)	
7	A-THIS IS SCHEMATIC REPRESENTATION ONLY, ACTUAL MACHINE MAY VARY SLIGHTLY.			
8	MOVEMENT SPEED	MANUAL PULL PUSH WITH 2-3 PEOPLE		
9	AUDIO-VISUAL ALARM ON BOTTOM FRAME			
10	LOCATION-INDOOR			

CUSTOMER-		ALL DIMENSIONS ARE IN mm. A4		
JOIST-O-MECH (SINCE 1987)		CO.NO	PRODUCT.NO.	
		DRAWN	AMITA	01.04.2025
		CHECKED	SANTOSH	01.04.2025
TITLE ELE. HYD. SCISSOR LIFT.		APPROVED	PRATIK	01.04.2025
			SCALE :	NTS
DRAWING NO.	OCT24-J02-1	SHEET NO.	1-1	REV. R0