

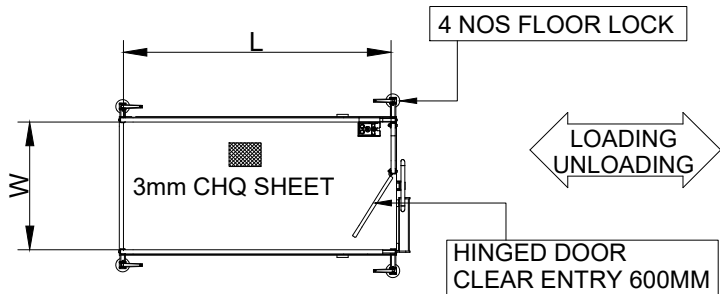


IF IN DOUBT PL ASK!

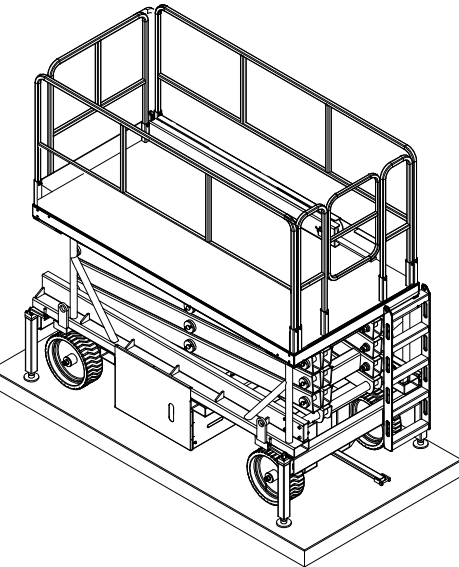

OPERATING PENDANT

3 SIDE BOLTED RAILING
(SQ. TUBE 32x32)

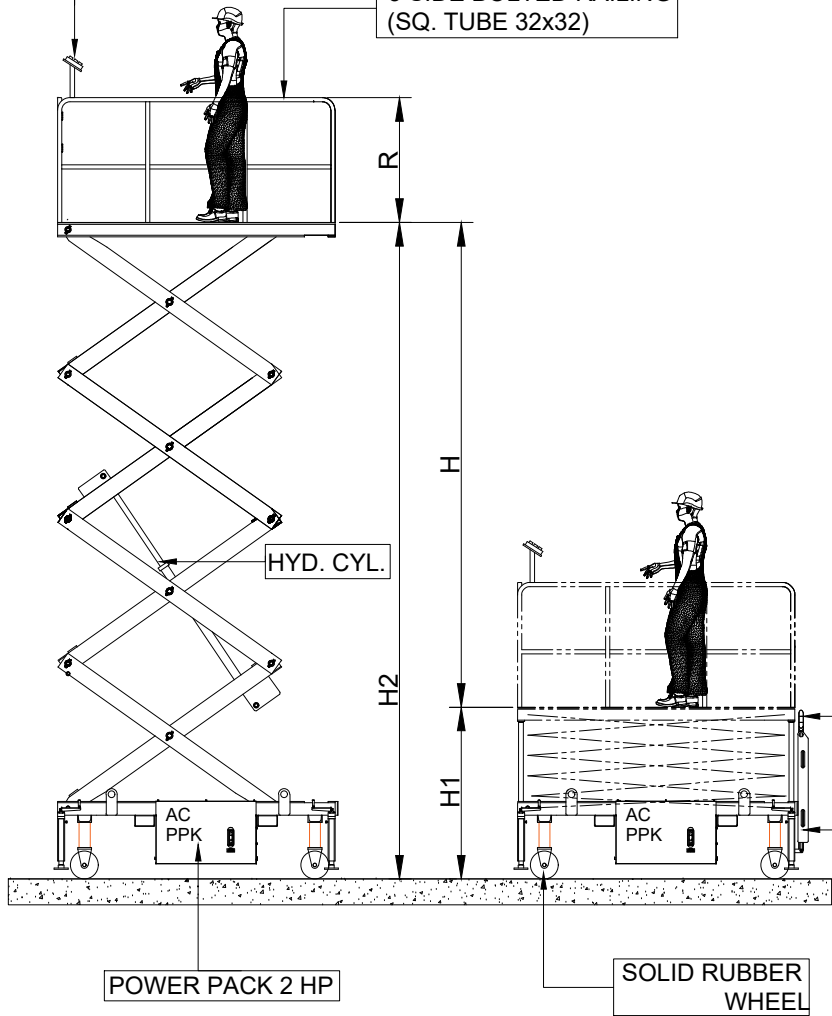

3D VIEW ONLY FOR REF.

SR	MATERIAL DESCRIPTION	MAKE
1	CONTACTOR	SCHNEIDER
2	SMPS	NHP
3	LIMIT SWITCH	JAY BALAJI
4	PUSH BUTTON	TEKNIK
5	MPCB	SCHNEIDER
6	MOTOR	IMPORTED (TARGET / EQUIVALENT)
7	CABLE	POLYCAB
8	TERMINALS	CONNECTWELL
9	PUSH BUTTON BOX AND PANEL	INHOUSE

SR	PARAMETERS	SYMBOL	SPECIFICATION
1	CAPACITY	C	500 KGS
2	PLATFORM LENGTH	L	1850
3	PLATFORM WIDTH	W	1000
4	POWERPACK	HP	2 HP
5	MIN HEIGHT	H1	1200
6	MAXIMUM HEIGHT	H2	6000
7	LIFT HEIGHT	H	4800
8	RAILING	R	900

1	MOC	M.S
FINISH	FRAME	GOLDEN YELLOW ENAMEL PAINT
	SCISSOR	GRAY ENAMEL PAINT
2	LIFT OPERATION	INCHING MODE
3	LOAD CONSIDERED	UNIFORMLY DISTRIBUTED
4	USABLE AREA	1750 L x 900 W (APPROX)
5	OVERALL M/C DIMN	2150 L X 1300 W X 2400H (APPROX)
6	LIFTING SPEED	2-2.5 M/MIN (APPROX.)
7	A-THIS IS SCHEMATIC REPRESENTATION ONLY, ACTUAL MACHINE MAY VARY SLIGHTLY.	
8	MOVEMENT SPEED	MANUAL PULL PUSH WITH 2-3 PEOPLE
9	AUDIO-VISUAL ALARM ON BOTTOM FRAME	
10	LOCATION-INDOOR	

00	-	-	-	-	-
REV.NO.	DESCRIPTION	DATE	DRAWN	CHECK	APP
CUSTOMER-		ALL DIMENSIONS ARE IN mm. A4			
JOIST-O-MECH (SINCE 1987)		CO.NO	PRODUCT.NO.		
		DRAWN	AMITA	01.04.2025	
		CHECKED	SANTOSH	01.04.2025	
TITLE ELE. HYD. SCISSOR LIFT.		APPROVED	PRATIK	01.04.2025	
		SCALE : NTS		REV. R0	
DRAWING NO.	OCT24-J05-1	SHEET NO.	1-1		