
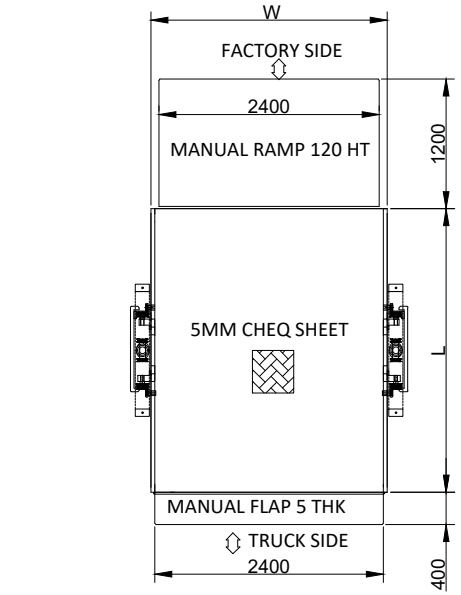


A	3 HP POWER PACK, CONTROL PANEL , HOOTER
B	PENDANT
C	2 L SIDE RAILING WITH CHAIN INTERLOCK

SIDE VIEW ONLY FOR
MANUAL FLAP AND RAMP

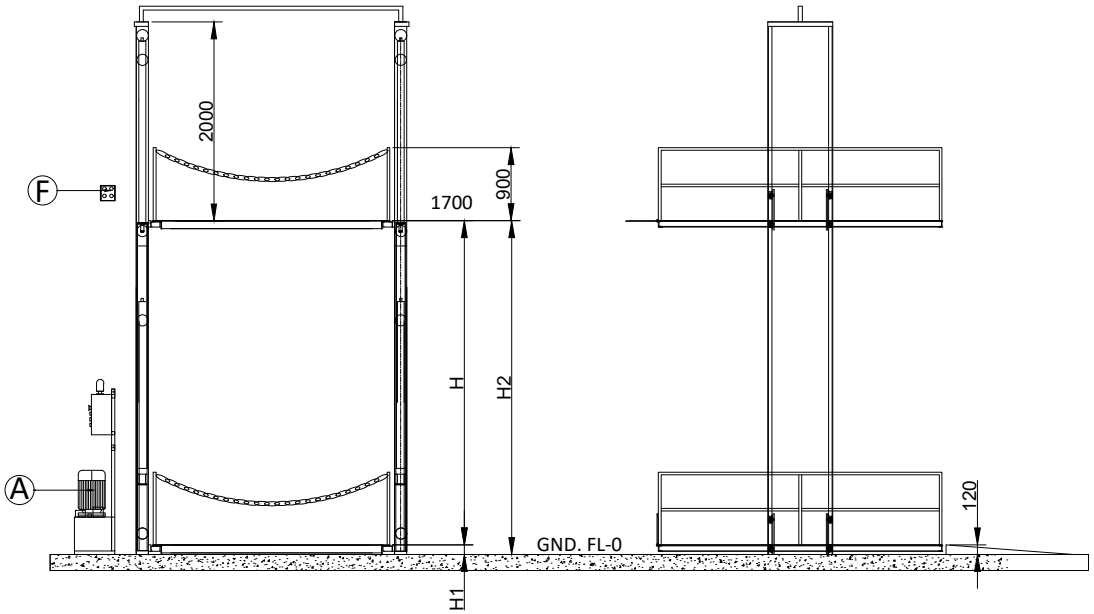

A #THIS IS SCHEMATIC REPRESENTATION ONLY.
ACTUAL MACHINE MAY VARY SLIGHTLY.

B #APPROX 10MM COMPRESSION LOAD PER MTR

SR	PARAMETERS	SYMBOL	SPECIFICATION
1	CAPACITY	C	1500 Kgs.
2	PLATFORM LENGTH	L	3000
3	PLATFORM WIDTH	W	2500
4	POWER PACK	P	3 HP
5	MIN HEIGHT	H1	120
6	MAX. HEIGHT	H2	1820
7	LIFTING HEIGHT	H	1700
8	RAILING	R	900
9	NO OF STOPS	INFINITE	
10	MOC	M.S ,MAST-RAL-1004	
11	LIFT OPERATION	INCHING MODE	
12	LOAD CONSIDERED	UNIFORMLY DISTRIBUTED	
13	USABLE AREA (APPROX)	2900L x 2400W	
14	OVERALL DIMN (APPROX)	3100 x 3300	
15	LIFTING SPEED (APPROX)	3-4 M/MIN	
16	HYDRAULIC CYLINDER	IN HOUSE	
17	MOTOR	IMPORTED	
18	HYDRAULIC PUMP	IMPORTED	
19	HYDRAULIC VALVE	IMPORTED	
20	HYDRAULIC HOSES	PARKER / MARKWELL	
21	SAFETY FEATURE	HYDRAULIC	1-HOSE BURST VALVE
		ELECTRIC	1-HOOTER 2-LIMIT SWITCH

CUSTOMER-BHARAT TECHNOPLAST		ALL DIMENSIONS ARE IN mm.	A4
JOIST-O-MECH (SINCE 1987)		CO.NO	PRODUCT.NO.
		DRAWN S.P 30.10.2026	
		CHECKED S.P 30.10.2026	
		APPROVED A.J 30.10.2026	
TITAL- ELECTRICAL HYDRAULIC GOOD LIFT.		SCALE : NTS	
DRAWING NO. OCT26-J28-01		SHEET NO. 1OF1	REV. R0