


IF IN DOUBT PL ASK!

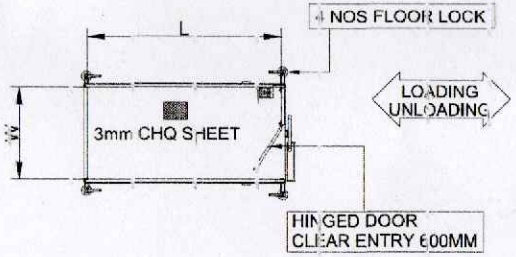

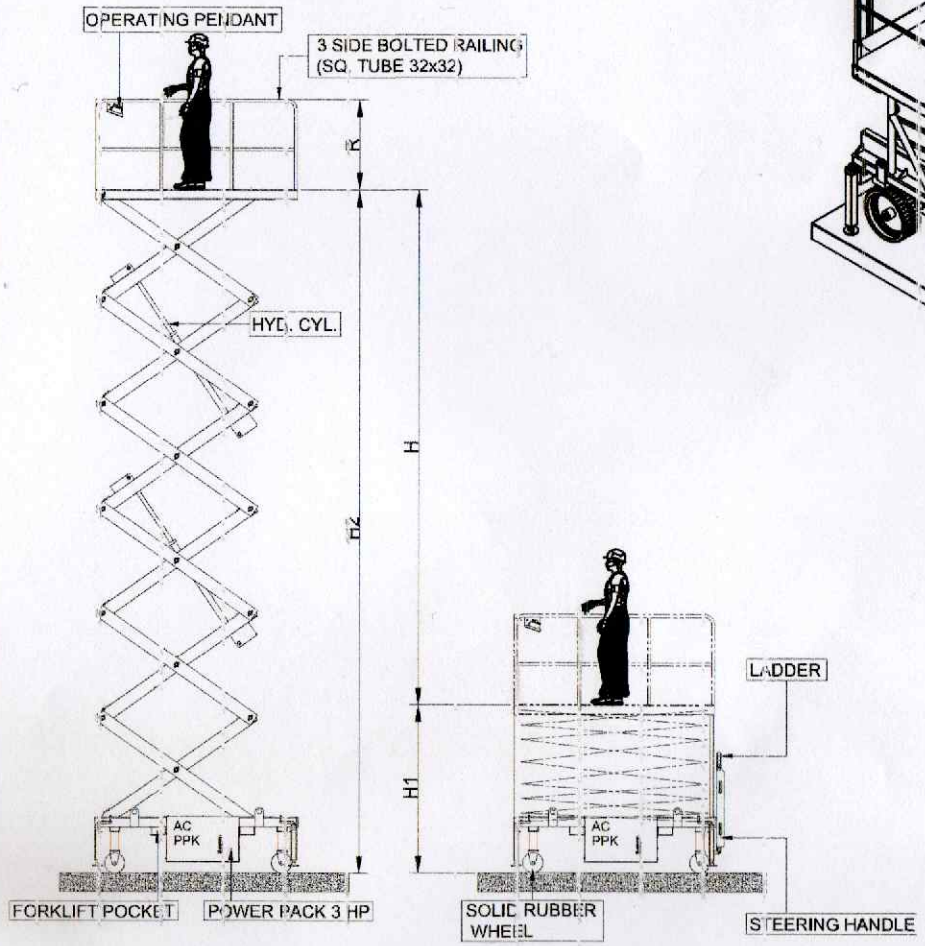

SR	MATERIAL DESCRIPTION	MAKE
1	CONTACTOR	SCHNEIDER
2	SMPS	NHP
3	LIMIT SWITCH	JAY BALAJI
4	PUSH BUTTON	TEKNIK
5	MPCB	SCHNEIDER
6	MOTOR	IMPORTED (TARGET / EQUIVALENT)
7	CABLE	POLYCAB
8	TERMINALS	CONNECTWELL
9	PUSH BUTTON BOX AND PANEL	INHOUSE

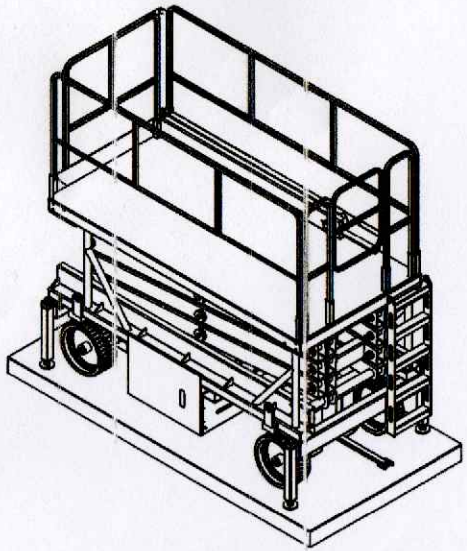

3D VIEW ONLY FOR REF.

SR	PARAMETERS	SYMBOL	SPECIFICATIO
1	CAPACITY	C	500 KGS
2	PLATFORM LENGTH	L	2500
3	PLATFORM WIDTH	W	1200
4	POWERPACK	HP	3 HP
5	MIN HEIGHT	H1	2000
6	MAXIMUM HEIGHT	H2	12000
7	LIFT HEIGHT	H	10000
8	RAILING	R	900

1	MOC		M.S
	FINISH	FRAME	GOLDEN YELLOW ENAMEL PAINT
		SCISSOR	GRAY ENAMEL PAINT
2	LIFT OPERATION		INCHING MODE
3	LOAD CONSIDERED		UNIFORMLY DISTRIBUTED
4	USABLE AREA		2400 L x 1100 W (APPROX)
5	OVERALL M/C DIMN		2800 L X 1500 W X 3200H (APPROX
6	LIFTING SPEED		2.5-3 M/MIN (APPROX.)
7	A-THIS IS SCHEMATIC REPRESENTATION ONLY, ACTUAL MACHINE MAY VARY SLIGHTLY.		
8	MOVEMENT SPEED		MANUAL PULL PUSH WITH 2-3 PEOP
9	AUDIO-VISUAL ALARM ON BOTTOM FRAME		
10	LOCATION-INDOOR		

Approved
Kapoor Chand
27/10/25

CUSTOMER-

ALL DIMENSIONS ARE IN mm

JOIST-O-MECH
(SINCE 1987)

CO.NO	PRODUCT.N	
DRAWN	RAVINDRA	01.0
CHECKED	PRADEEP	01.0
APPROVED	PRATIK	01.0

TITLE
ELE. HYD. SCISSOR LIFT.

SCALE : NT

DRAWING NO. OCT24-J01-1

SHEET NO. 1-1

R
R